
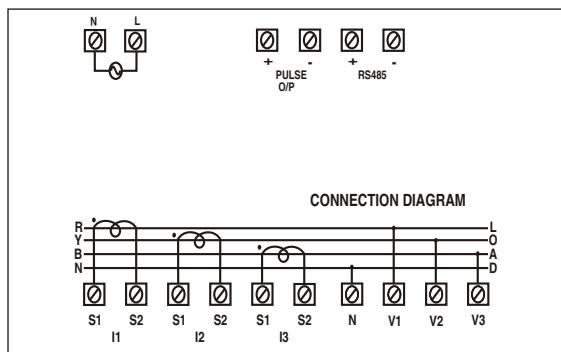


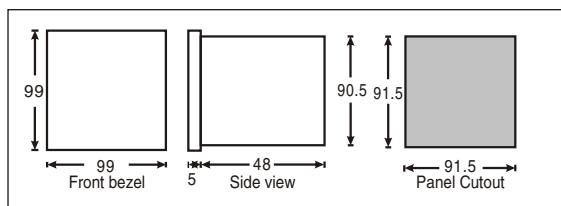

96 x 96

Ordering Information

Order Code	Supply Voltage
MFM384	90 to 270V AC / DC

Terminal Connections**Dimensions (in mm)****MFM384****■ Display**

: LCD
4 rows, 4 digits (Lowest 8 digits for energy display)
Bargraph representation for current

■ Input Type

: 3Ø-3/4 wire, 2Ø-3 wire, 1Ø-3 wire, 1Ø-2 wire

■ Input Voltage

: 19 to 519V AC (phase to phase), 50/60Hz
11 to 300V AC (phase to neutral), 50/60Hz

■ Input Current

: 1A / 5A Max (External CT must be connected for current more than 5A)

■ Resolution

: For energy- 0.01k, 0.1k, 1k, 0.01M, 0.1M, 1M, 10M
(depending upon CT ratio X PT ratio)
: For Power, Voltage, Current- Auto resolution
: For Power factor- Resolution is 0.001

■ Measuring Parameters

: -Voltage (P-P / P-N) (Individual / Average)
-Current (I1, I2, I3) (Individual / Average)
-Frequency
-Power Factor (Individual / Average)
-Active, Reactive, Apparent Power (Individual / Total)
-Active, Reactive, Apparent Energy (Total)

■ Accuracy

: Voltage(L-N / L-L), Current - 0.5% of F.S
Power factor - ±0.01 PF
Frequency - 0.1%
Power (kW, kVA, kVAr) - ±1% of F.S
Active energy - Class 1
Reactive energy - Class 2
Apparent energy - Class 1

■ C.T Secondary programmable between 1A or 5A.**■ C.T primary programmable from 1A / 5A to 10,000A (Programmable for any value)****■ PT primary programmable from 100V to 500kV (Programmable for any value)****■ PT secondary 100 to 500V AC (phase to phase)****■ Supply Voltage**

: 90 to 270V AC / DC

■ Pulse Output

: 1(Opto-isolated)

Pulse Voltage

: 24V DC

Pulse Current

: 100mA (Max)

Pulse Duration

: 100ms

■ RS485 MODBUS Communication**■ Operating Temperature:** 0 to +50° C